

INSTRUMENT APPROACH CHART


CAT. A B C D

AD ELEV: 899, THR ELEV: 876 (31 hPa)

MEROWE **HSMN**  
RNAV (GNSS) RWY 20


APP: 118.4  
TWR: 118.4

VAR  
3° E  
(15)

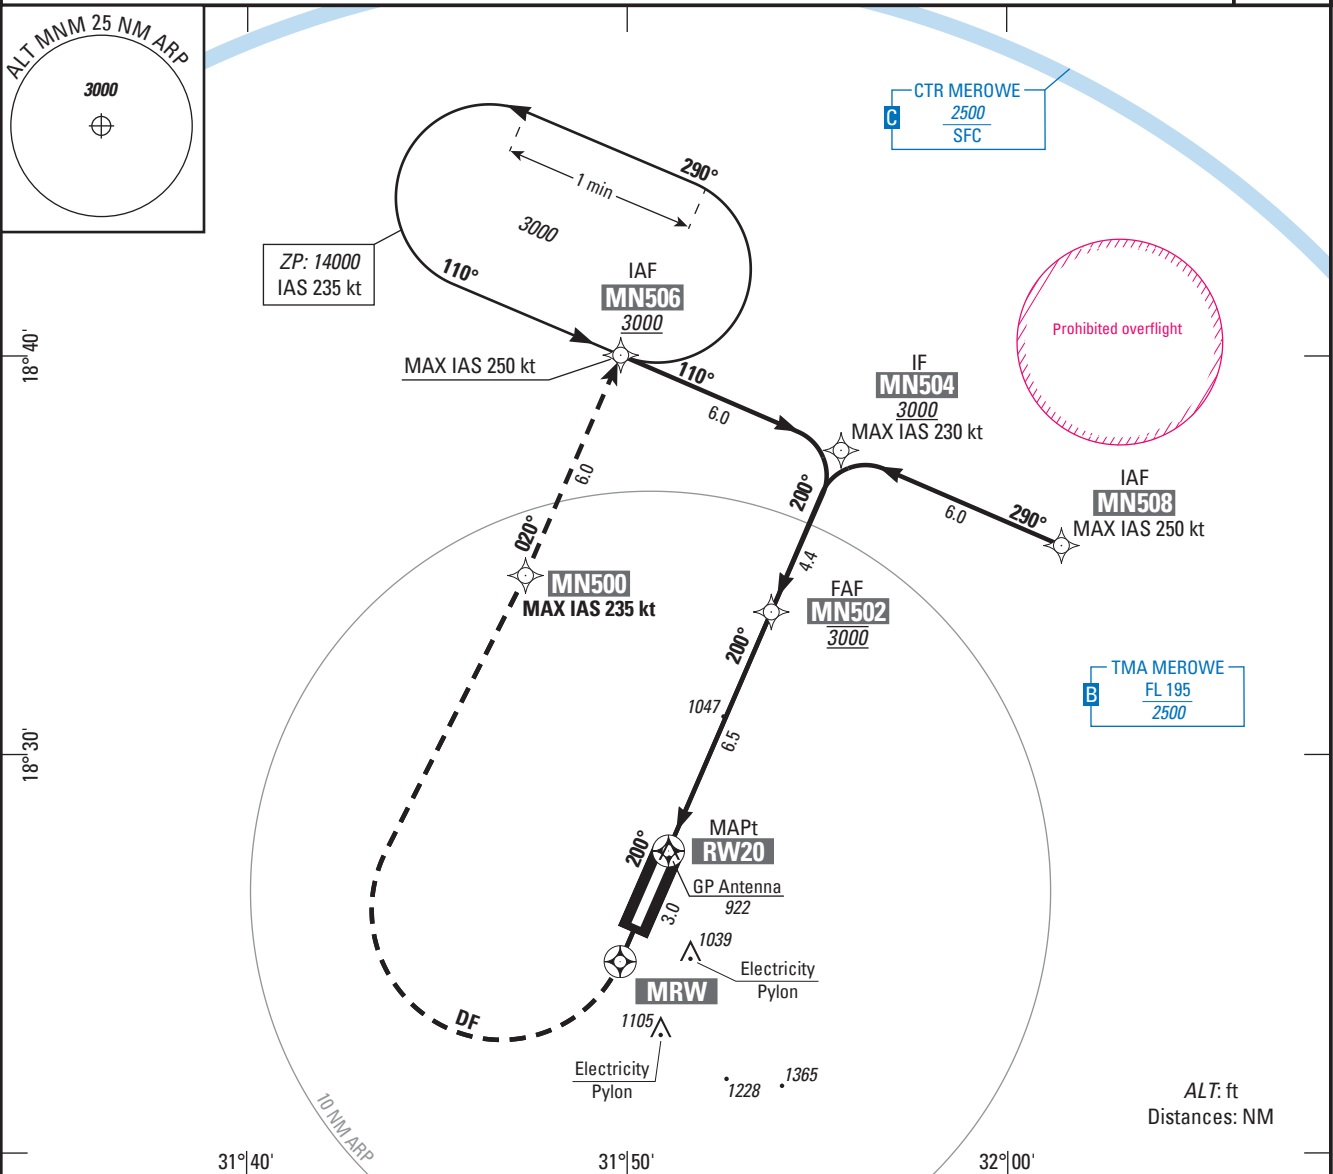

TA: 7000

Missed Approach:  
Climb up to 3000 ft to MRW on course 200°  
turn right direct to MN500 then to MN506.  
At MN506, join the holding pattern or follow ATC instructions.  
MAX IAS 235 kt until MN500.

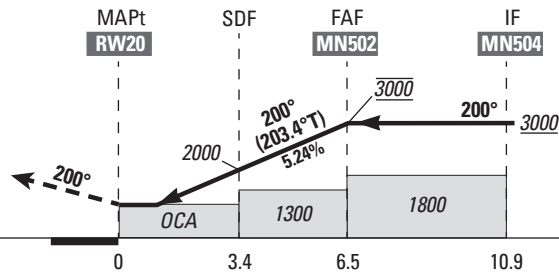

THR (NM) ←

MNM AD : Vertical distances in feet, RVR and VIS in meters.

CAT	LNAV	Circling		DIST FAF/MAPt									
		OCA	VIS	NM	ALT	NM	ALT	NM	ALT				
A	1170	1340	1900	6	2837	5	2518	4	2200	3	1882	2	1563
B		1400	2800										
C		1630	3700										
D		1760	4600										
FAF - MAPt 6.5 NM		70 Kt	85 Kt	100 Kt	115 Kt	130 Kt	145 Kt	160 Kt	185 Kt				
VSP (ft/min)		5 min 34	4 min 35	3 min 54	3 min 23	3 min 00	2 min 41	2 min 26	2 min 06				
		370	450	530	610	690	770	850	980				

NOTE: